




110121


SIRIS SQUARE 4500/840 MLC

8596328101212

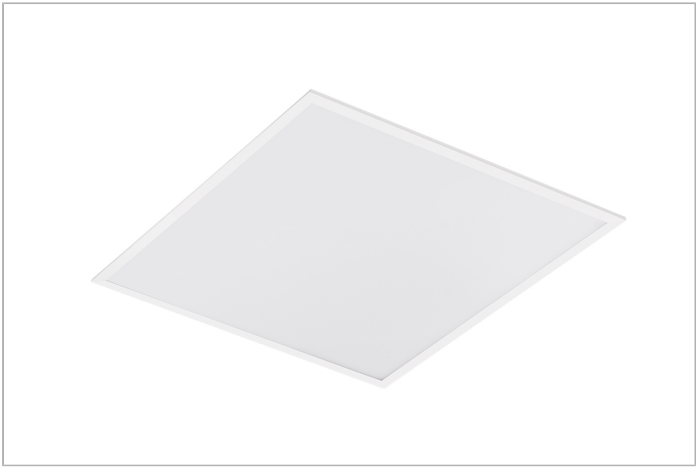

- Degree of protection: IP40
- Ambient temperature: -20–35 °C
- Impact strength: IK04
- Life time: 50000 hours
- System efficacy: 151 lm/W
- Colour rendering index CRI: 80-89, 3000–5000 K
- Chromaticity tolerance (initial MacAdam): SDCM3
- Protection class: I
- Max. number of luminaires per circuit breaker B16: 53
- Max. number of luminaires per circuit breaker C16: 58
- Flickering value Pst LM: 1
- Power factor: 0,95
- Stroboscope effect value SVM: 0,01
- Total harmonic distortion: 10
- Energy efficiency class of the light source: C

- Body: Aluminium profile, white (RAL 9003)
- Diffuser: Micropyramide (PS), UV stable, impact resistant
- Reflector: Steel sheet, white (RAL 9003)
- Connection: to compact driver with strain relief clip
- Modern, low-profile light fitting for indoor lighting in offices, corridors and common rooms
- Fitting intended to be fixed to M600 raster ceiling
- ON/OFF electronic driver (AC, DC on demand)

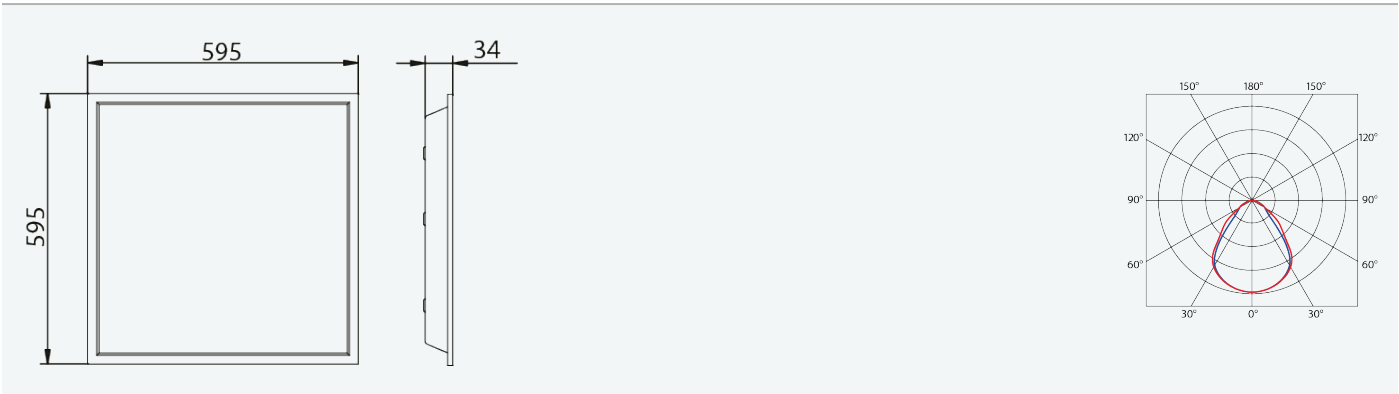

Code	Type	Ta Max.: [°C]	Luminous flux of LED modules [lm]	Luminous flux of light fitting: [lm]	Power consumption: [W]	System efficacy: [lm/W]	Net weight: [kg]
110121	SIRIS SQUARE 4500/840 MLC	35	4490	3860	25,6	151	1,7

The values stated for power consumption and luminous flux are in a tolerance of ± 7.5 %

FEATURES



CERTIFICATION



DOWNLOAD

- INSTALLATION MANUAL
- DATA SHEET
- CE
- LDT DATA

